



US006027433A

United States Patent [19]
Flynn

[11] **Patent Number:** **6,027,433**
[45] **Date of Patent:** **Feb. 22, 2000**

[54] **MULTI-FUNCTION EXERCISE APPARATUS THAT UTILIZES A SINGLE CABLE PULLEY SYSTEM**

Primary Examiner—John Mulcahy
Attorney, Agent, or Firm—LaMorte & Associates

[57] **ABSTRACT**

[76] **Inventor:** **Brian M. Flynn**, 118 Twining Rd., Oreland, Pa. 19075

An exercise apparatus that enables a person to perform a variety of different exercises. The exercise apparatus has a frame structure that includes a plurality of vertical columns. A bench assembly is supported by at least one of the vertical columns at a variable angle of inclination. A weight holder also is coupled to at least one of the vertical columns, wherein the weight holder is free to move in a vertical direction along the length of the column. In addition to the bench assembly, at least one exercise mechanism is coupled to the frame structure. Each exercise mechanism includes an element that is pivotably coupled to the frame structure. A pulley is connected to each element at a point a predetermined distance from the pivot point. Additional pulleys are mounted on the frame structure, thereby forming an overall pulley arrangement including the pulleys on the exercise mechanisms. A cable extends through the pulley arrangement including the pulleys on the exercise mechanisms. The tension in the cable biases the various exercise mechanisms into set positions relative the frame structure. As a person engages the exercise mechanisms and moves the exercise mechanisms out of their set positions, the tension in the cable is altered and the weight holder is moved.

[21] **Appl. No.:** **09/020,348**

[22] **Filed:** **Feb. 9, 1998**

[51] **Int. Cl.⁷** **A63B 21/06**

[52] **U.S. Cl.** **482/98; 482/137; 482/138; 482/142; 482/99; 482/100; 482/104**


[58] **Field of Search** **482/94, 97, 98, 482/100, 104, 136-138, 142, 99**

[56] **References Cited**

U.S. PATENT DOCUMENTS

3,306,611	2/1967	Gaul	482/94
4,746,115	5/1988	Lahman	482/142 X
4,781,374	11/1988	Lederman	482/142 X
5,135,451	8/1992	Chen	482/98
5,549,530	8/1996	Fulks	482/100
5,554,085	9/1996	Dalebout	482/137
5,665,036	9/1997	Hsieh	482/100
5,807,219	9/1998	Webber et al.	482/100 X

13 Claims, 6 Drawing Sheets

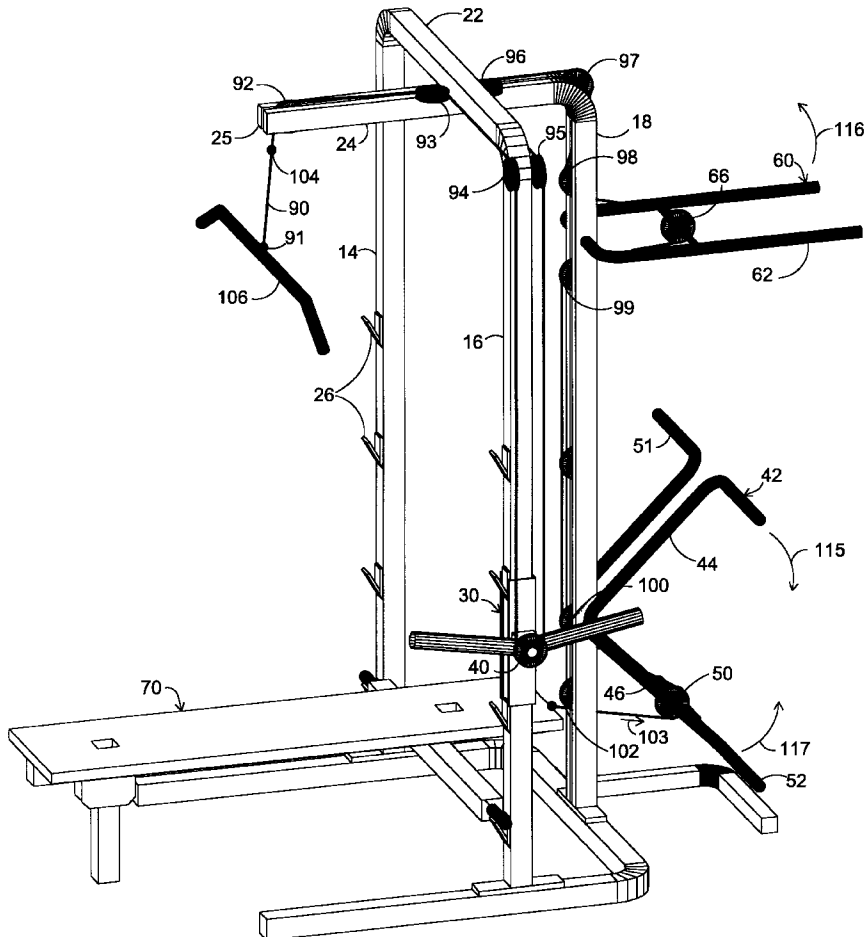

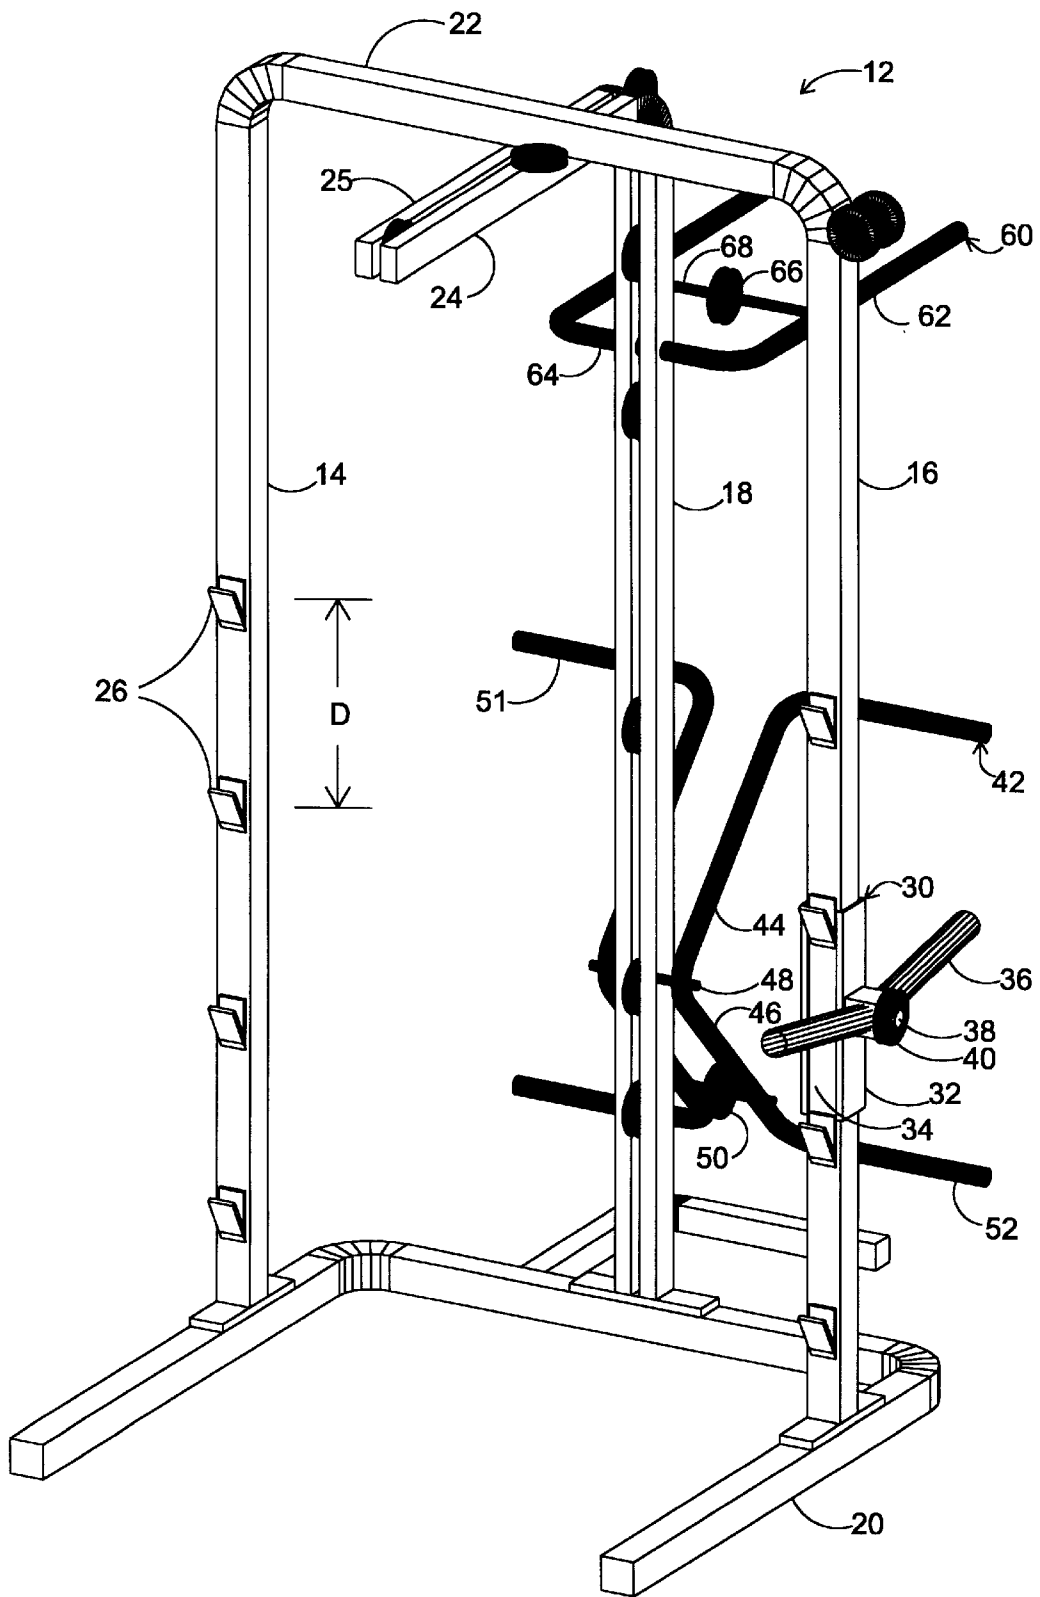


Figure 1

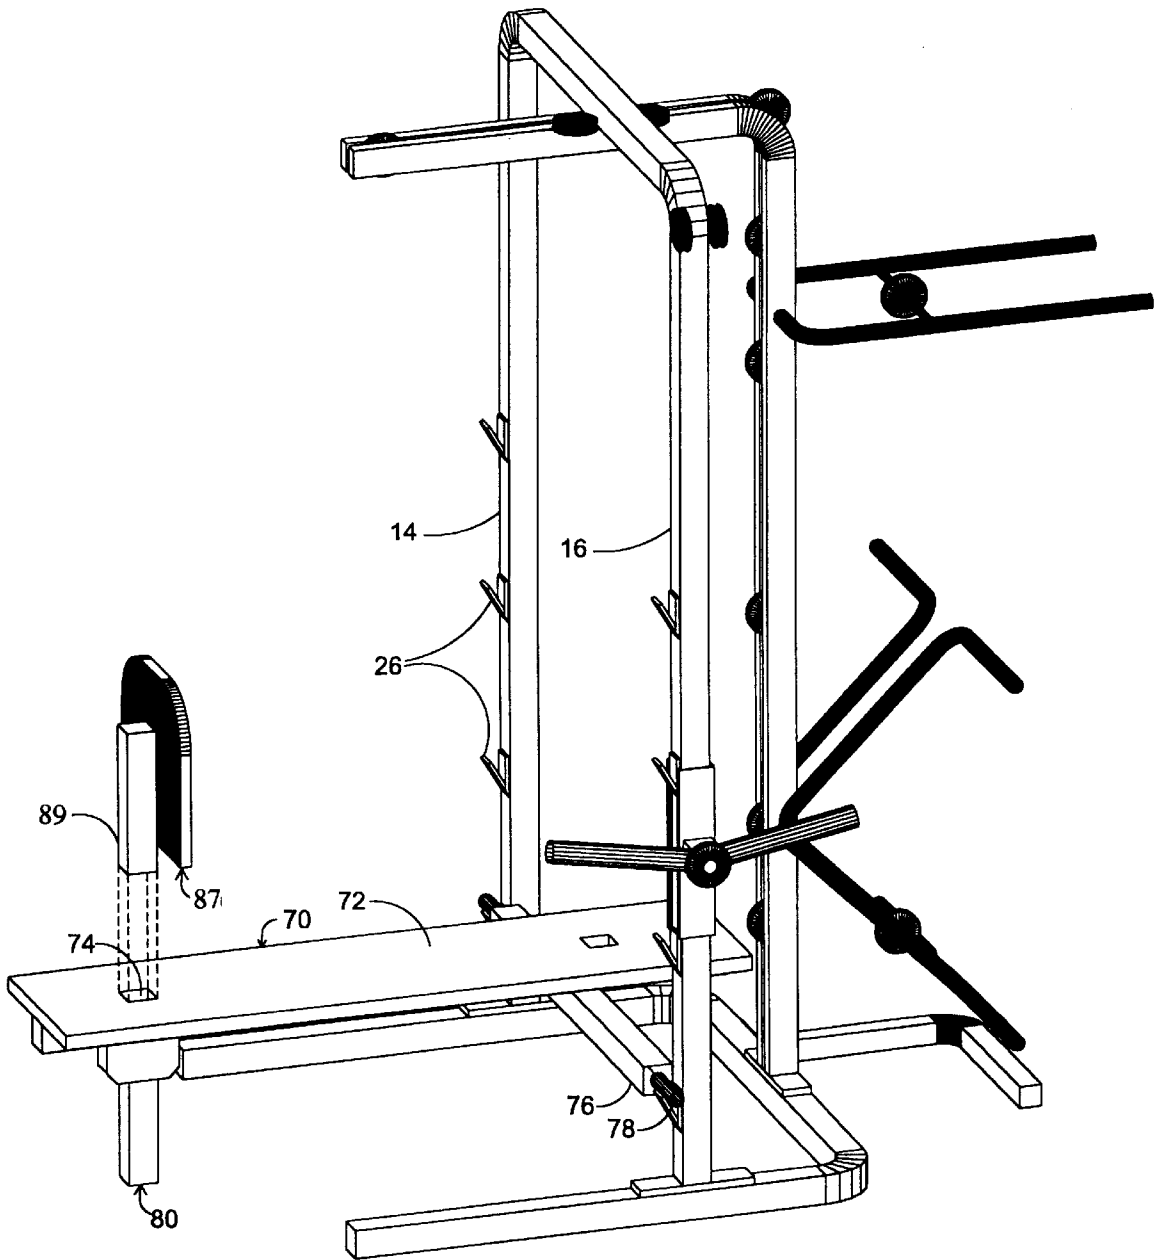


Figure 2

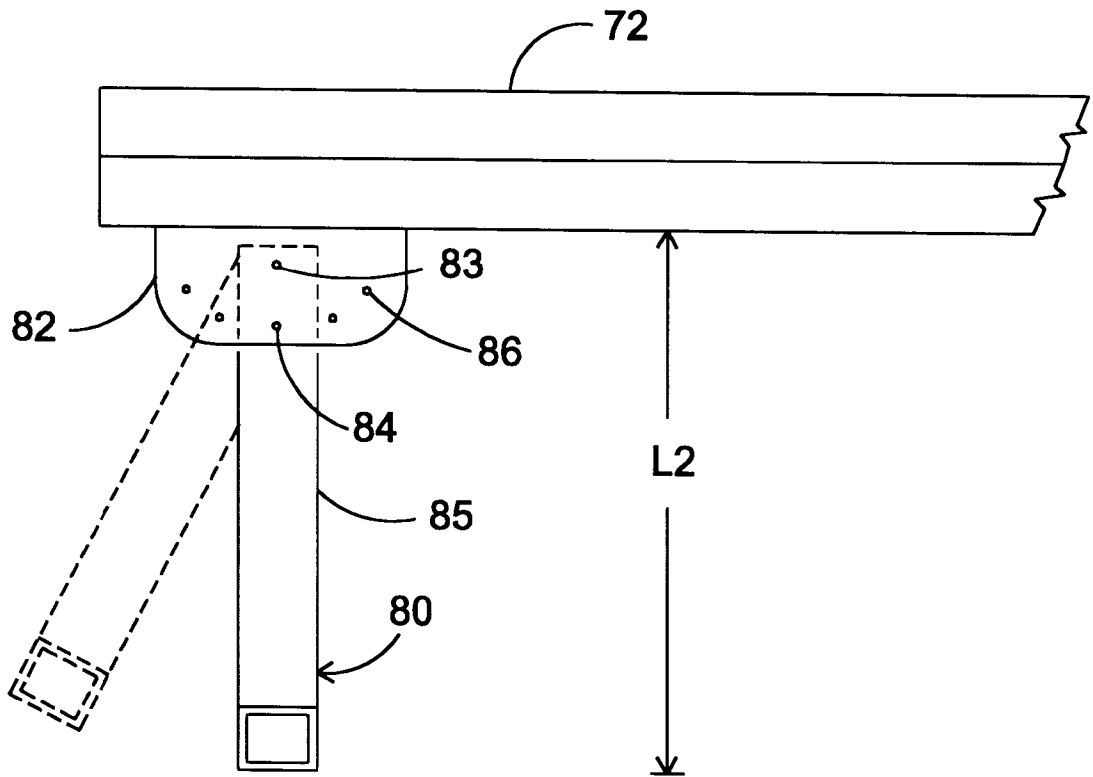


Figure 3

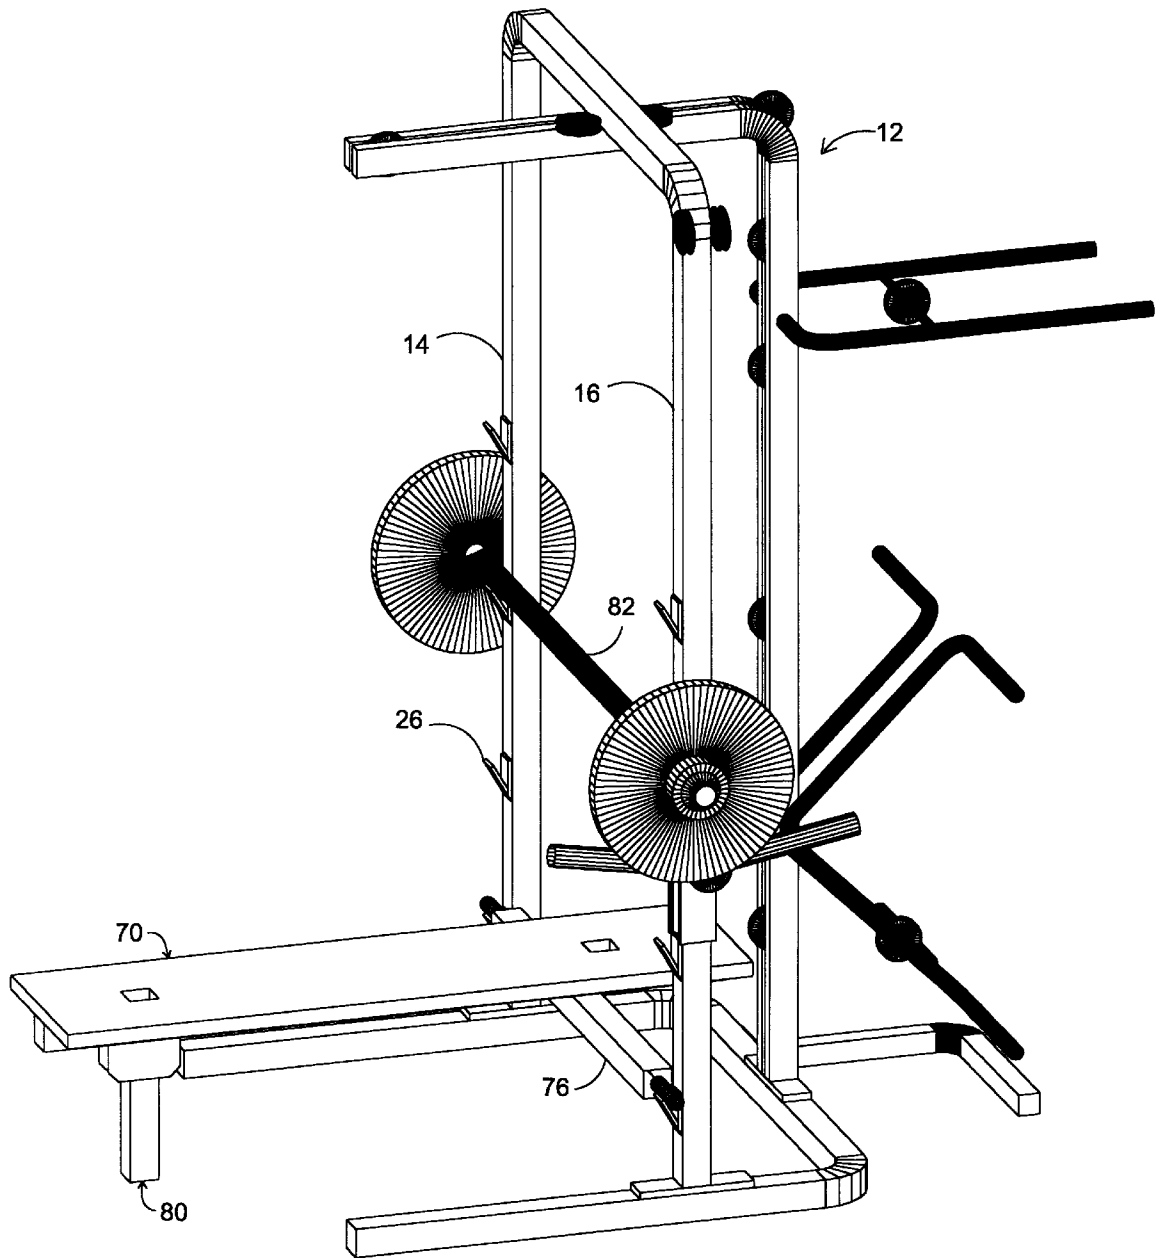


Figure 4

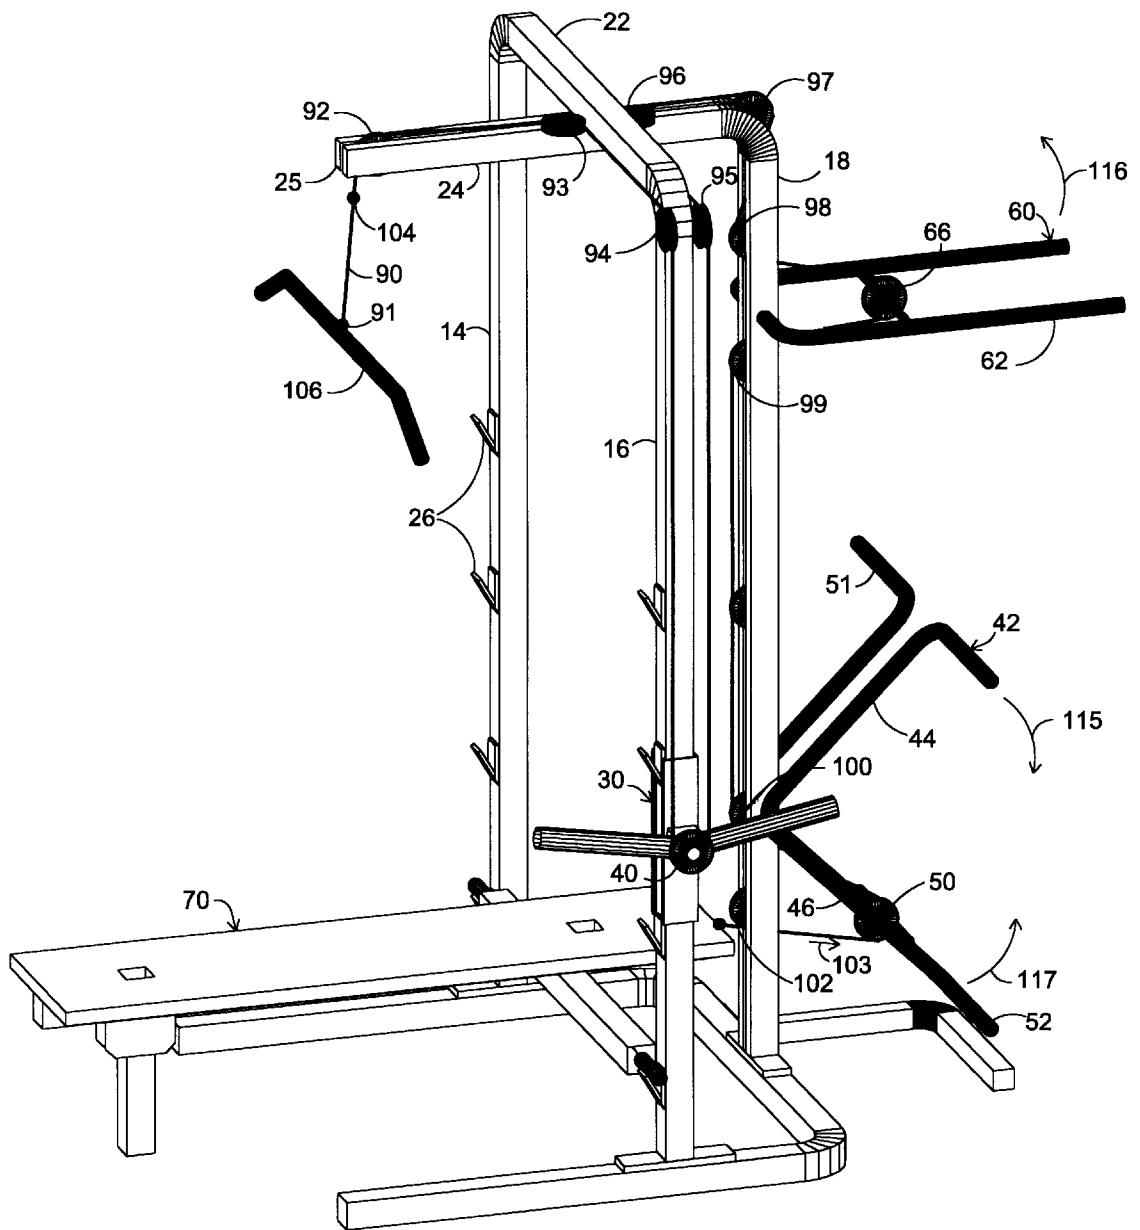


Figure 5

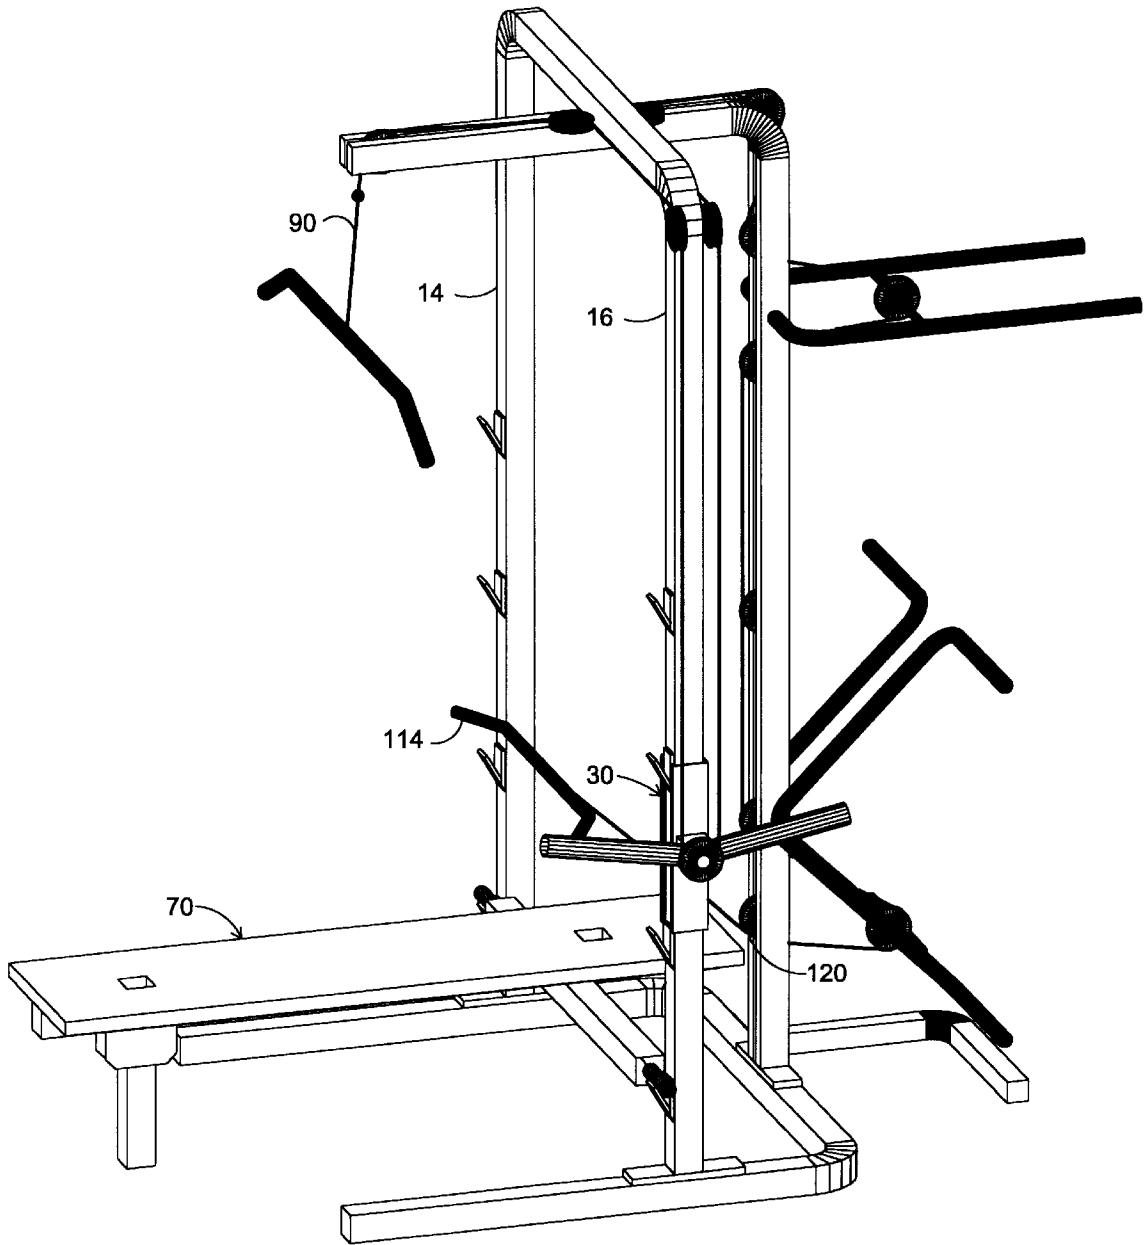


Figure 6

MULTI-FUNCTION EXERCISE APPARATUS THAT UTILIZES A SINGLE CABLE PULLEY SYSTEM

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to exercise equipment that enables a person to perform a multitude of different exercises. More particularly, the present invention relates to exercise devices that enable a person to engage a single set of weights through a variety of different positions on the exercise device.

2. Description of the Prior Art

The prior art is replete with exercise devices for exercising almost every conceivable muscle group in the human body. Many of these prior art devices are convertible between various configurations to enable a person using the device to selectively exercise one of a selected number of muscle groups. The problem with many of these prior art exercise devices is either their large size or their complexity in changing from one type of exercise to another. The size problem often occurs with prior art exercise devices that require a person to move between several different dedicated exercise stations to perform different exercises. Obviously, the use of separate dedicated stations, no matter how ergonomically joined, occupies a large section of floor space. Such complex multi-station exercise devices are also very difficult to assemble and are beyond the economic means of most average consumers. This prevents many individuals from owning such multi-station exercise devices, thereby limiting a person's exposure to such equipment to infrequent visits to large health clubs.

Smaller exercise devices, such as that exemplified in U.S. Pat. No. 5,263,915 to Habing, entitled Exercise Method With Adjustable Position Exercise Members, are marketed to individuals who want an exercise machine capable of exercising different muscle groups but whose available floor space is limited. In such prior art exercising devices, space is saved by providing only one set of weights. Different exercise stations are then connected to the single set of weights using a system of cables and pulleys. Such prior art exercise devices are very expensive. Additionally, they are very complex to assemble and maintain due to the myriad of different cables and pulleys.

Certain prior art devices have simpler cable and pulley systems that use a limited number of cables and pulleys. Such prior art devices are exemplified by U.S. Pat. No. 4,915,377 to Malnke, entitled Exercise Apparatus. The problems associated with such prior art exercise devices is that the limited pulley and cable system allows for only a few select exercises to be performed. Accordingly, exercises are not available for many of the major muscle groups in the body.

A need therefore exists for an exercise device that is low cost and provides exercises for many of the major muscle groups in the body, yet is highly compact and uses a simplified pulley and cable system. This need is met by the present invention as described and claimed below.

SUMMARY OF THE INVENTION

The present invention is an exercise apparatus. The exercise apparatus has a frame structure that includes a plurality of vertical columns. A bench assembly is supported by at least one of the vertical columns at a variable angle of inclination. A weight holder also is coupled to at least one of

the vertical columns, wherein the weight holder is free to move in a vertical direction along the length of the column.

In addition to the bench assembly, at least one exercise mechanism is coupled to the frame structure. Each exercise mechanism includes an element that is pivotably coupled to the frame structure. A pulley is connected to each element at a point a predetermined distance from the pivot point. Additional pulleys are mounted on the frame structure, thereby forming an overall pulley arrangement.

A cable extends through the pulley arrangement including the pulleys on the exercise mechanisms. The cable is coupled to the weight holder, wherein the weight of the weight holder applies a tension to the cable. The tension in the cable biases the various exercise mechanisms into set positions relative the frame structure. As a person engages the exercise mechanisms and moves the exercise mechanisms out of their set positions, the tension in the cable is altered and the weight holder is moved. The weight of the weight holder therefore acts as a source of resistance to the physical movement of the exercise mechanisms.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, reference is made to the following description of exemplary embodiments thereof, considered in conjunction with the accompanying drawings, in which:

FIG. 1 is a perspective view of one preferred embodiment of the frame structure of the present invention exercise apparatus;

FIG. 2 is a perspective of a bench assembly shown in conjunction with the frame structure of FIG. 1;

FIG. 3 is a fragmented side view of the bench assembly shown in FIG. 2, showing the leg assembly below the bench assembly;

FIG. 4 is a perspective view of the frame of FIG. 1 shown in conjunction with a bench bar and an alternate bench assembly;

FIG. 5 is a perspective view of the frame of FIG. 1 shown in one preferred pulley configuration with an optional exercise bar; and

FIG. 6 is a perspective view of the frame of FIG. 1 shown in a preferred pulley configuration with an optional rowing handle.

DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 1, an exemplary embodiment of a base frame structure 12 of an exercise device is shown in accordance with the present invention. The shown figure illustrates the base frame structure 12 of the present invention exercise device without the secondary attachments which will later be explained. The base frame structure 12 of the exercise device contains three vertical columns 14, 16, 18 that extend upwardly from a common base structure 20. The first vertical column 14 and the second vertical column 16 are joined together at the top by a first cross member 22. Accordingly, the first vertical column 14, the first cross member 22 and the second vertical 16 column create an inverted U-shaped section of frame.

A second cross member 24 is affixed to the bottom of the first cross member 22. The second cross member 24 is oriented at a perpendicular relative the first cross member 22. The distal end of the second cross member 24 is connected to the top of the third vertical column 18. Accordingly, the third vertical column 18 and the second

cross member **24** create an inverted L-shaped section of frame. The proximal end **25** of the second cross member **24** is free and hangs supported in the air.

Hook projections **26** extend from the first vertical column **14** and the second vertical column **16**. The hook projections **26** on the first and second vertical columns **14, 16** align with each other along parallel horizontal lines. The hook projections **26** may be permanently attached to the first and second vertical columns **14, 16** or may be removable assemblies that can be selectively added to the vertical columns **14, 16**, as needed. In the preferred embodiment, the hook projections **26** are positioned on the first and second vertical columns **14, 16** spaced apart by a distance D, where distance D is between six inches and one foot. However, it will be understood that smaller or larger spacings may be used.

A weight holder **30** is disposed on the second vertical column **16**. The weight holder **30** includes a tubular element **32** through which the second vertical column **16** passes. A slot **34** is formed along one side of the tubular element **32**. The slot **34** is large enough to enable the hook projections **26** to pass therethrough. As a result, the weight holder **30** is free to move reciprocally up and down the length of the second vertical column **16**. Two angled supports **36** extend from the tubular element **32** of the weight holder **30**. As will be later explained, the angled elements **36** are cylindrical in shape having a diameter that enables weight plates to be placed around the angled elements **36**. A pivot pin **38** is affixed to the tubular element **32**. The pulley **40** is coupled to the pivot pin **38** and is free to rotate around the pivot pin **38**.

In the shown embodiment, the second vertical column **16** is a square beam and the tubular element **32** is a square to fit around the square beam. It should be understood that such an embodiment is merely exemplary and any other known configuration can be used that would allow the weight holder **30** to move freely along the length of the second vertical column **16**.

The third vertical column **18** supports two different exercise interface mechanisms. The first mechanism is a curling mechanism **42** that is used for leg curls. The curling mechanism **42** has at least one upper element **44** and at least one lower element **46**. The upper elements **44** and the lower elements **46** meet at an apex point at an angle at least as great as 80°. The apex point is coupled to the third vertical column by a pivot pin **48**. The distal end of the upper elements **44** and the lower elements **46** terminate with a horizontal bars **51, 52**. A curling mechanism pulley **50** is disposed between the lower elements **46** proximate the horizontal bar **52**. The curling mechanism pulley **50** is disposed on an axle that is suspended between the two lower elements **46**. Accordingly, the curling mechanism pulley **50** is free to rotate about the longitudinal axis of the axle.

The second exercise mechanism supported by the third vertical column **16** is a press mechanism **60**. The press mechanism **60** is used for performing press exercises that develop the calves and arms, as will later be more fully explained. The press mechanism **60** is a generally U-shaped structure having two parallel arm elements **62** that are joined at one end by a lateral element **64**. The lateral element **64** is pivotably coupled to the third parallel column **18**. As a result, the lateral element **64** acts as a pivot pin and the two parallel arms **62** are able to move about the longitudinal axis of the lateral element **64**. A press mechanism pulley **66** is disposed between the parallel arm elements **62**. The press mechanism pulley **66** is disposed on an axle **68** that is suspended between the two parallel arm elements **62**. Accordingly, the press mechanism pulley **66** is free to rotate about the longitudinal axis of the axle **68**.

The three vertical columns **14, 16, 18** and the two cross members **22, 24** combine to create the overall base frame structure **12** of the exercise device. On the base frame structure **12** are supported a plurality of pulleys. The purpose of the pulleys, as will be later explained, is to couple various different exercise mechanisms with the weight holder **30** so that a manual manipulation of the various exercise stations will result in the movement of the weight holder **30**.

Referring to FIG. 2, a first optional element is shown in conjunction with the base frame structure **12**. The optional element shown is a bench assembly **70**. The bench assembly **70** includes a cushioned planar bench **72** having two apertures **74** disposed through it. Each of the apertures **74** is approximately one third of the bench length from one of the two ends of the bench **72**. A long support rod **76** is connected to the planar bench **72**. The long support rod **76** is adapted to engage the hook projections **26** that extend from the first and second vertical columns **14, 16**. In the preferred embodiment, the long support rod **76** terminates at both of its ends with an enlarged head **78**. The enlarged head **78** prevents the long support rod **76** from moving laterally when engaged within the hook projections **26**. Accordingly, the long support rod **76** must be moved upwardly in a generally vertical direction in order to disengage the hook projections **26**.

Since the long support rod **76** engages any two hook projections **26** on the vertical columns **14, 16**, it should be understood that the angle of the planar bench **72** can be selectively altered by changing the height of where the long support rod **76** engages the hook projections **26** on the first and second vertical columns **14, 16**.

A vertical leg assembly **80** also extends from the planar bench **72** near the end of the bench opposite the long support rod **76**. The vertical leg can be any static member that is affixed to the bottom of the planar bench **72**. However, in a preferred embodiment, the vertical leg is adjustable with respect to the planar bench **72**. Referring to FIG. 3, an adjustable vertical leg assembly is shown. From FIG. 3 it can be seen that the vertical leg assembly **80** includes a support bracket **82** that extends downwardly from the bottom of the planar bench **72**. A rigid leg **85** is pivotably coupled to the support bracket **82** at pivot point **83**. An aperture **84** passes through the rigid leg **85** just below the pivot point **83**. Apertures **86** are also disposed in the support bracket. A pin (not shown) passes through the aperture **84** in the rigid leg **85** and selectively extends into one of the apertures **86** in the support bracket **82** depending upon the angle of the rigid leg **85** relative to the planar bench **72**. By selectively varying the angle of the rigid leg **85**, the vertical distance L2 between the planar bench **72** and the bottom of the rigid leg **85** can be selectively adjusted. Accordingly, by changing the effective length of the vertical leg assembly, the angle of inclination for the planar bench **72** can also be changed. It will be understood that the shown adjustment of the leg assembly is exemplary and any other adjustable leg assembly can be used that enables the height of the planar bench to be selectively varied.

Returning to FIG. 2, it can be seen that a seat **87** may be added to the planar bench **72** by passing the rod **89** on the back of the seat **87** through one of the apertures **74** on the planar bench **72**. As a result, when the planar bench **72** is sloped at a steep angle of inclination, a person can sit on the seat **87** and use the planar bench **72** as a back support.

In FIG. 4, the basic bench press configuration of the present invention is shown. In this configuration, the bench assembly **70** is joined to the base frame structure **12** at a

desired angle of inclination. The desired angle of inclination is achieved by selectively varying the angle of the vertical leg assembly **80** and the height at which the long support rod **76** engages the hook projections **26**. A benching bar **82** can be positioned over the bench assembly **70** by resting the benching bar **82** in a set of hook projections **26** above the hook projections **26** engaged by the bench assembly **70**. A person laying on the bench assembly **70** below the benching bar **82** can then perform bench press exercises in the conventional manner by repeatedly lifting the bench bar **82** out of the hook projections **26**.

Referring to FIG. 5, the first exercise that utilizes a cable **90** is shown. Furthermore, the preferred pathway of the cable **90** is illustrated. The cable **90** is a continuous cable having two ends. The first end **91** of the cable **90** is suspended from the proximal end **25** of the second cross member **24**. The cable **90** passes over the first vertical pulley **92** positioned at the proximal end **25** of the second cross member **24**. The cable **90** then extends rearwardly along the second cross member **24** and engages a second horizontal pulley **93**. The second horizontal pulley **93** reorients the cable **90** by 90° in the horizontal plane along the first cross member **22**. The cable **90** then engages third vertical pulley **94** at the top of the second vertical column **16**. The third vertical pulley **94** reorients the cable 90° into the vertical plane. The cable **90** travels downwardly along the second vertical column **16** and engages a fourth vertical pulley **40**. The fourth vertical pulley **40** is affixed to the weight holder **30** that travels along the length of the second vertical column **16**. The fourth vertical pulley **40** reorients the cable 180°, wherein the cable **90** travels back up toward the top of the second vertical column **16**.

A fifth vertical pulley **95** is positioned at the top of the second vertical column **16**. The cable **90** passes around the fifth vertical pulley **95**, wherein the cable **90** is reoriented 90° into the horizontal plane. The cable **90** travels along the first cross member **22** until the cable **90** engages a sixth horizontal pulley **96**. The sixth horizontal pulley **96** reorients the cable 90° so that the cable **90** travels along the length of the second cross member **24**. At the distal end of the second cross member **24**, the cable **90** engages a seventh vertical pulley **97**. The seventh vertical pulley **97** reorients the cable 90° into the vertical plane.

The cable **90** travels downwardly along the third vertical column **18**. Just above the height of the press mechanism **60** is a eighth vertical pulley **98**. The cable **90** passes behind the eighth vertical pulley **98**, wherein the eighth vertical pulley **98** reorients the cable **90** toward the press mechanism pulley **66**. The press mechanism pulley **66** reorients the pulley 180° back toward the third vertical column **18**. At the third vertical column **18**, a ninth vertical pulley **99** reorients the cable **90** back into the vertical plane along the length of the third vertical column **18**. The cable **90** then passes across a tenth vertical pulley **100** that reorients the cable **90** toward the leg curling pulley **50** on the leg curling mechanism **42**. The leg curling pulley **50** reorients the cable 180° back toward the third vertical column **18**.

At the third vertical column **18**, an eleventh vertical pulley **102** reorients the cable toward the bench assembly **70**. The eleventh pulley has a restricted opening. A stop is positioned on the cable **90** at a point past the eleventh pulley **102**. The stop prevents the cable **90** from being pulled backward past the position of the stop in the direction of arrow **103**.

In FIG. 5, the first end **91** of the cable **90** is suspended at a point over the bench assembly **70**. The cable **90** also contains a stop **104** positioned proximate the first end **91**.

The stop **104** is sized not be able to pass the first vertical pulley **92**. An exercise bar **106** can then be coupled to the end of the cable **90** over the bench assembly **70**. As a person pulls down on the exercise bar **106**, the cable **90** is pulled taut and the weight holder **30** is pulled up the third vertical column **16**. Obviously, the more free weights that are added to the weight holder **30**, the more difficult it becomes to pull down the exercise bar **106**.

Referring to FIG. 6, it can be seen that the bottom end of the cable **90** optionally can be connected to a set of handles **114** that extend over the bench assembly **70**. The handles **114** are joined to the end of the cable **90** to enable a person sitting on the bench to perform a variety of exercises, such as rowing and the like, by pulling on the handles **114**. As a person pulls on the handles **114**, the cable **90** becomes taut and the weight holder **30** is biased against gravity up the length of the second vertical column **16**.

Returning to FIG. 5, it can be seen that to use the leg curling mechanism **42** a person lays in either the supine or prone position on the bench assembly **70**. When a person is laying in the supine position, the person's ankles can engage the horizontal bar **52** at the end of the lower elements **46** of the leg curling mechanism **42**. As a person straightens his/her legs, the leg curling mechanism **42** rotates in the direction of arrow **117**. This tightens the cable **90** and causes the weight holder **30** to move up the second vertical column **16**. When a person is laying in the prone position, the back of a person's ankles can engage the horizontal bar **51** at the end of the upper elements **44** of the leg curling mechanism **42**. As a person bends his/her legs, the leg curling mechanism **42** rotates in the direction of arrow **115**. This tightens the cable and causes the weight holder **30** to move up the second vertical column **18**.

A person utilizes the press mechanism **60** by standing below the press mechanism **60** and straddling the leg curling mechanism **42**. The person can then push the elongated arms **62** of the press mechanism **60** upwardly using the calf muscles or the arm muscles. As the elongated arms **62** of the press mechanism **60** is pushed upwardly, the press mechanism **60** rotates in the direction of arrow **116**. This movement applies tension to the cable **90** and causes the weight holder **30** to ride up the second vertical column **16**.

Although the above described embodiments of the present invention exercise apparatus are believed to represent the best mode of the present invention, it should be understood that many described components of the present invention have known functional equivalents. As such, devices such as adjustable length legs, tubular frames, varied pulley orientations and the like should be recognized as being covered by this application. Additionally, all changes in proportions, orientations and materials can also be made by a person skilled in the art. All such modifications are intended to be covered by the scope of the present invention as set forth by the appended claims.

What is claimed is:

1. An exercise device, comprising:

- a frame structure having a first vertical column, a second vertical column and a third vertical column;
- a plurality of hook projections extending from said first vertical column and said second vertical column;
- a bench assembly supported by said first vertical column and said second vertical column at a variable angle of inclination;
- a weight holder coupled to said second vertical column, wherein said weight holder is freely movable in a vertical direction;

7

at least one exercise mechanism coupled to said frame structure, wherein each said exercise mechanism includes an element pivotably coupled to said frame structure and a pulley supported by said element;

a pulley arrangement coupled to said frame structure; 5
 a cable extending through said pulley arrangement and each said pulley on said at least one exercise mechanism, wherein said cable engages said weight holder and the movement of said at least one exercise mechanism relative said frame structure creates a tensile force in said cable that acts to move said weight holder. 10

2. The device according to claim 1, wherein said bench assembly has an cross element that selectively engages at least one of said hook projections, whereby said frame structure selectively supports said bench assembly between said first vertical column and said second vertical column, and said angle of inclination is dependent upon which of said hook projections are engaged by said bench assembly. 15

3. The device according to claim 1, wherein said bench assembly includes a bench and at least one leg that acts in conjunction with said frame structure to support said bench at said angle of inclination. 20

4. The device according to claim 1, wherein said cable has two ends and said device further includes at least one graspable element that can be selectively coupled to one of said ends of said cable. 25

5. The device according to claim 4, wherein said pulley arrangement orients one end of said cable to a point above said bench assembly, and said graspable element is an exercise bar. 30

6. The device according to claim 4, wherein said pulley arrangement orients one end of said cable to a point at one end of said bench assembly and said graspable element is a handle.

8

7. The device according to claim 1, wherein said weight holder includes two rigid elements adapted to receive weight plates thereon, wherein said rigid elements are arranged in a generally V-shaped configuration.

8. The device according to claim 1, wherein said at least one exercise mechanism is attached to said third vertical column.

9. The device according to claim 1, wherein said at least one exercise mechanism includes a leg curling mechanism having at least one upper element and at least one lower element that meet at a common point, wherein said common point is coupled to the frame structure by a pivot pin and the movement of said leg curling mechanism about said pivot pin causes said pulley to move relative said frame structure and create a change in tension in said cable. 15

10. The device according to claim 9, wherein said at least one upper element and said at least one lower element terminate with horizontal bars.

11. The device according to claim 9, wherein said pulley is coupled to said at least one lower element and said pulley arrangement is configured so that said cable biases said pulley toward said frame structure.

12. The device according to claim 9, wherein said at least one exercise mechanism includes a press mechanism having at least one elongated arm that is coupled to the frame structure, whereby a movement of said press mechanism about said pivot pin causes said pulley to move relative said frame structure and create a change in tension in said cable.

13. The device according to claim 1, wherein said bench assembly has a generally flat top surface and at least one aperture disposed through said top surface, wherein a seat support selectively engages said at least one aperture and extends generally at a perpendicular from said top surface.

* * * * *