



US006030006A

# United States Patent [19]

[11] Patent Number: **6,030,006**

Lin

[45] Date of Patent: **Feb. 29, 2000**

## [54] SPRING BIASED CLAMPING DEVICE FOR FLANGED CONNECTIONS

### FOREIGN PATENT DOCUMENTS

813192 5/1937 France ..... 285/420

[76] Inventor: **Peter Lin**, 525 Cardinal Dr., Dresher, Pa. 19025

*Primary Examiner*—Lynne H. Browne  
*Assistant Examiner*—Greg Binda  
*Attorney, Agent, or Firm*—LaMorte & Associates

[21] Appl. No.: **09/027,757**

### [57] ABSTRACT

[22] Filed: **Feb. 23, 1998**

[51] **Int. Cl.**<sup>7</sup> ..... **F16L 23/00**

[52] **U.S. Cl.** ..... **285/411**; 285/420; 24/205; 24/279

[58] **Field of Search** ..... 285/409, 410, 285/411, 415, 420, 366, 367; 24/20.5, 24, 20 LS, 279 B; 292/256.75, 256.65; 220/326; 215/287; 16/308


A clamp device for joining a flanged connection. The clamp device has a plurality of arcuate segments, wherein each of the arcuate segments has two ends. A pivot couples at least one end of each arcuate segment to another of the arcuate segments to produce a chain of arcuate segments that extend from a first end to a second end. The chain of arcuate segments is configurable into an annular structure when the first end is brought into abutment with the second end. A torsion spring is disposed around each pivot. Each torsion spring acts to bias the arcuate segments into the configuration that produces the annular structure. A rocking bolt is coupled to the second end of the chain of arcuate segments. The rocking bolt is joined to the second end by a second pivot and is positionable throughout a predetermined range. A biasing element is provided for biasing the rocking bolt into one position within the predetermined range.

### [56] References Cited

#### U.S. PATENT DOCUMENTS

2,967,325	1/1961	Herzfeld	.....	16/308 X
4,568,115	2/1986	Zimmerly	.....	285/411
4,657,284	4/1987	Fiori	.....	285/39
5,018,768	5/1991	Palatchy	.....	285/24
5,384,936	1/1995	Van Walraven	.....	24/279
5,893,611	2/1999	Munley et al.	.....	24/279 X

**8 Claims, 4 Drawing Sheets**

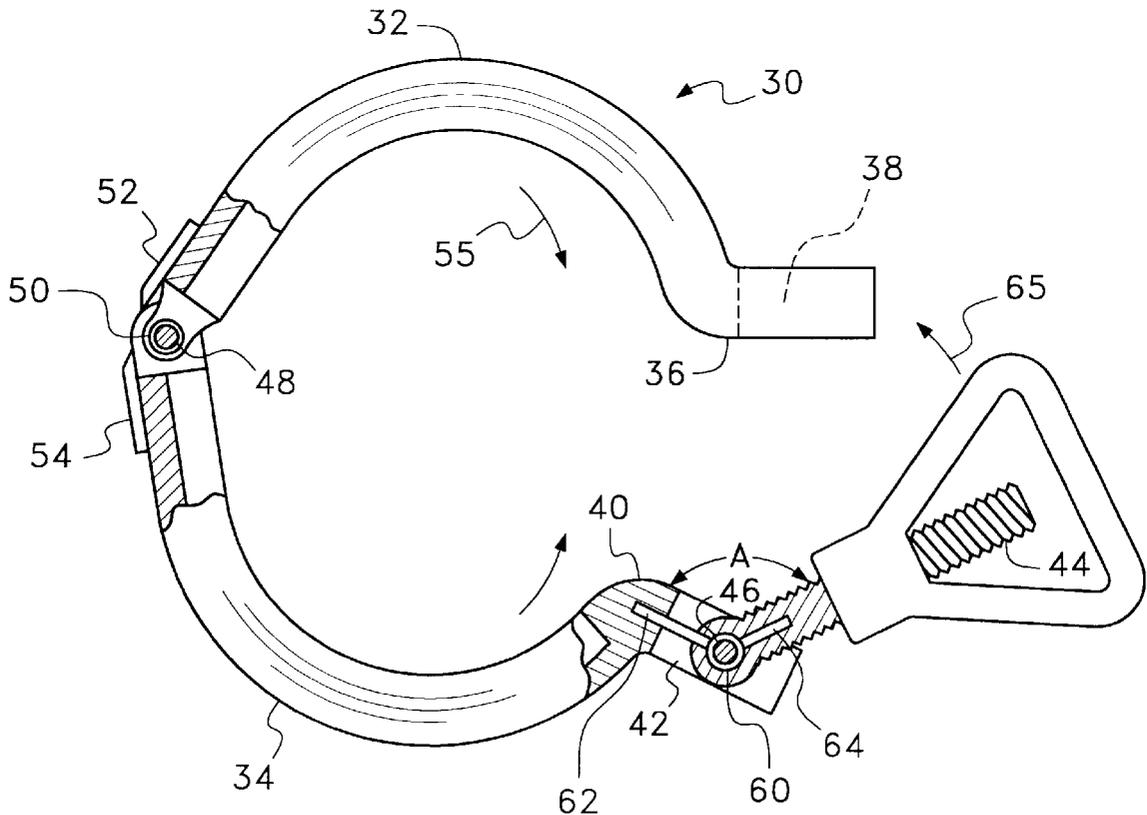

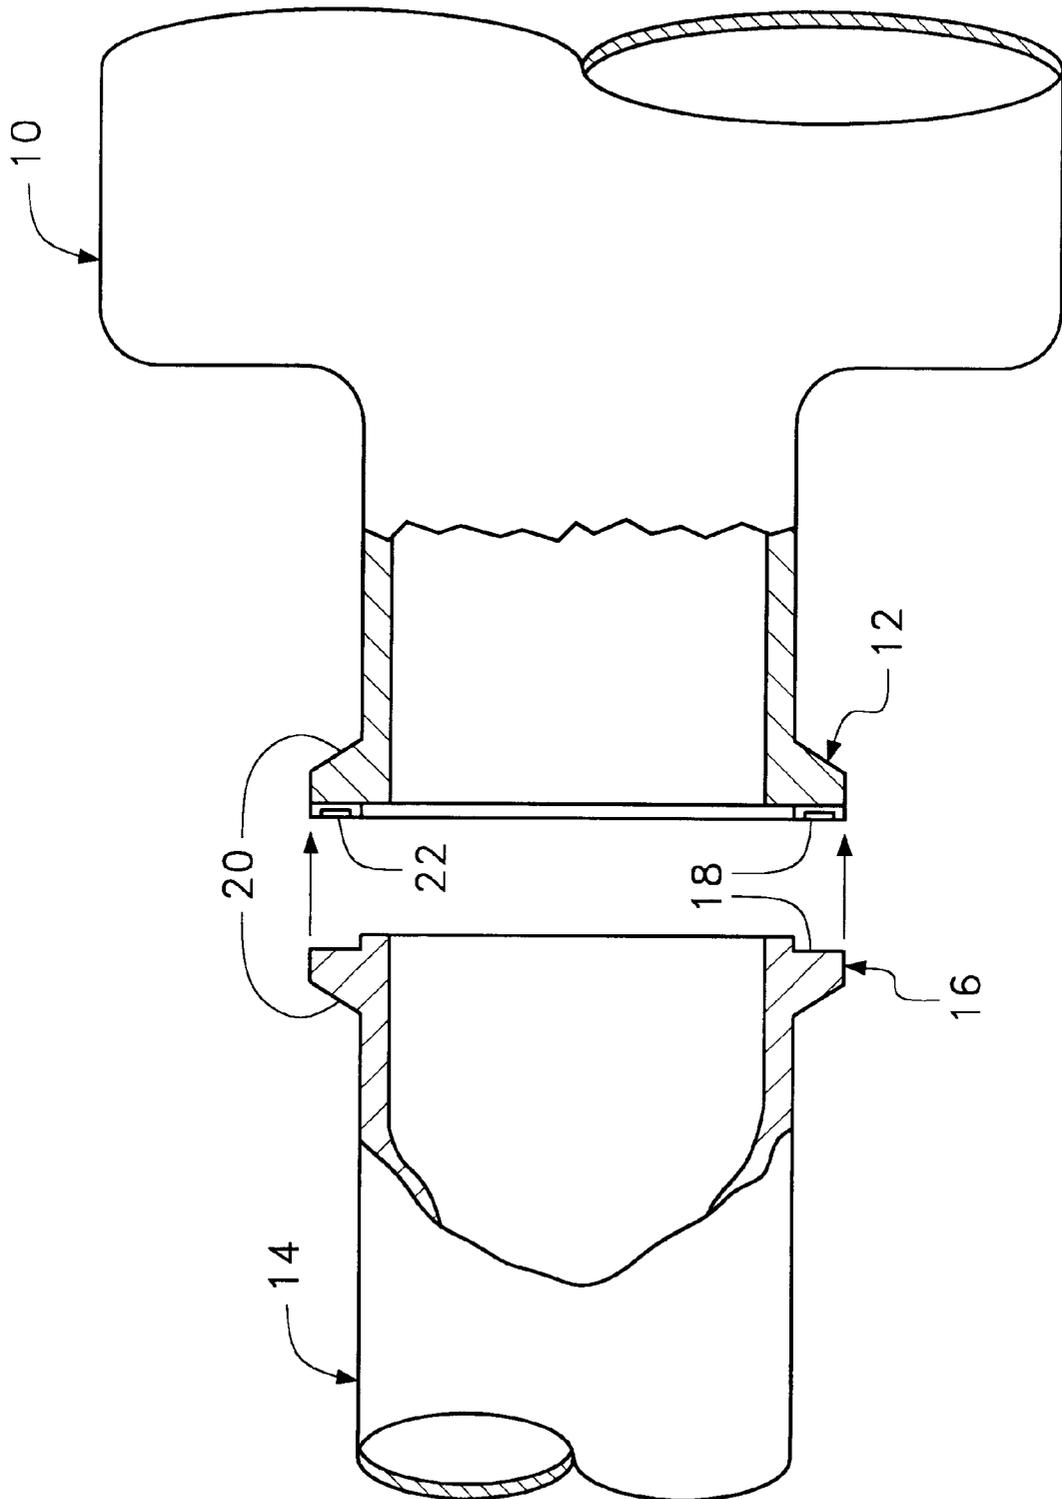


Fig. 1

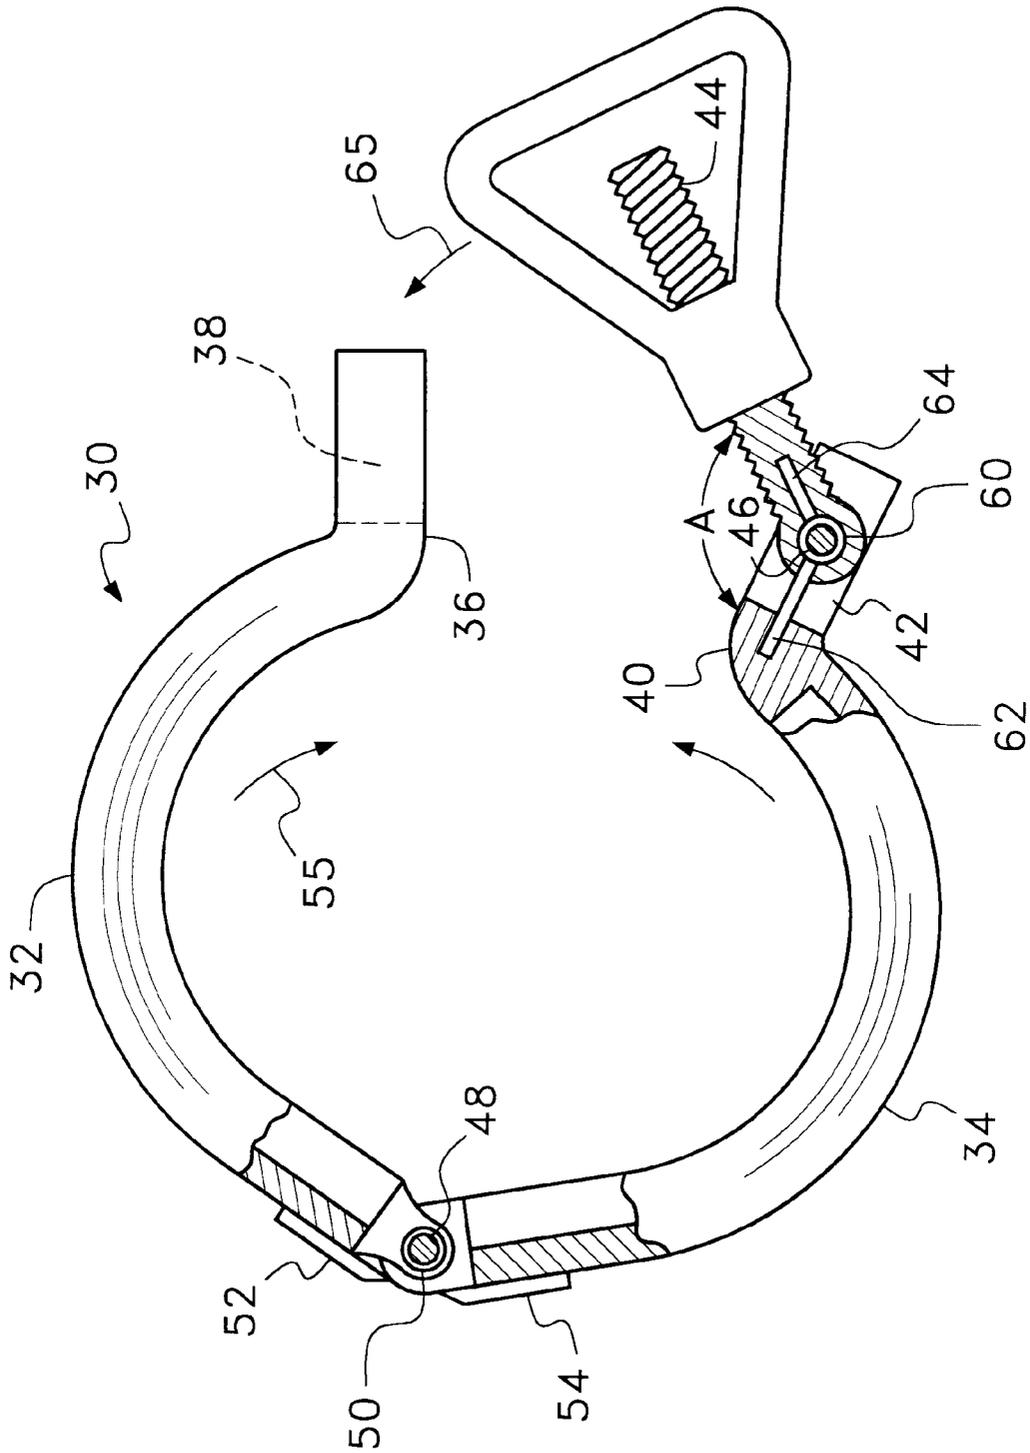


Fig. 2

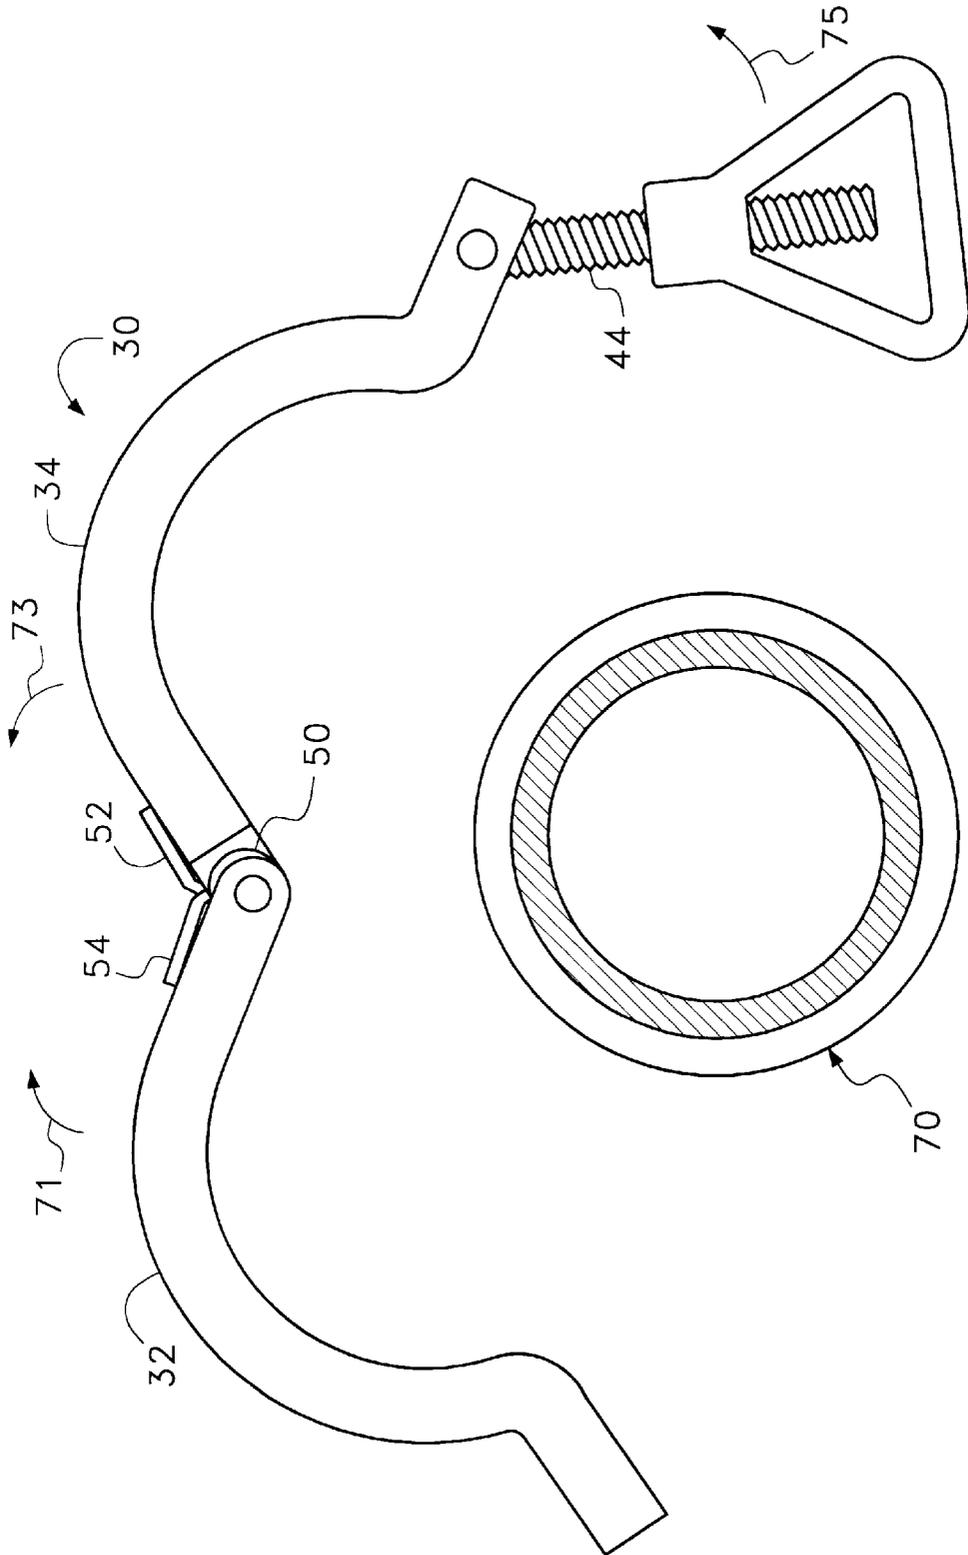


Fig. 3

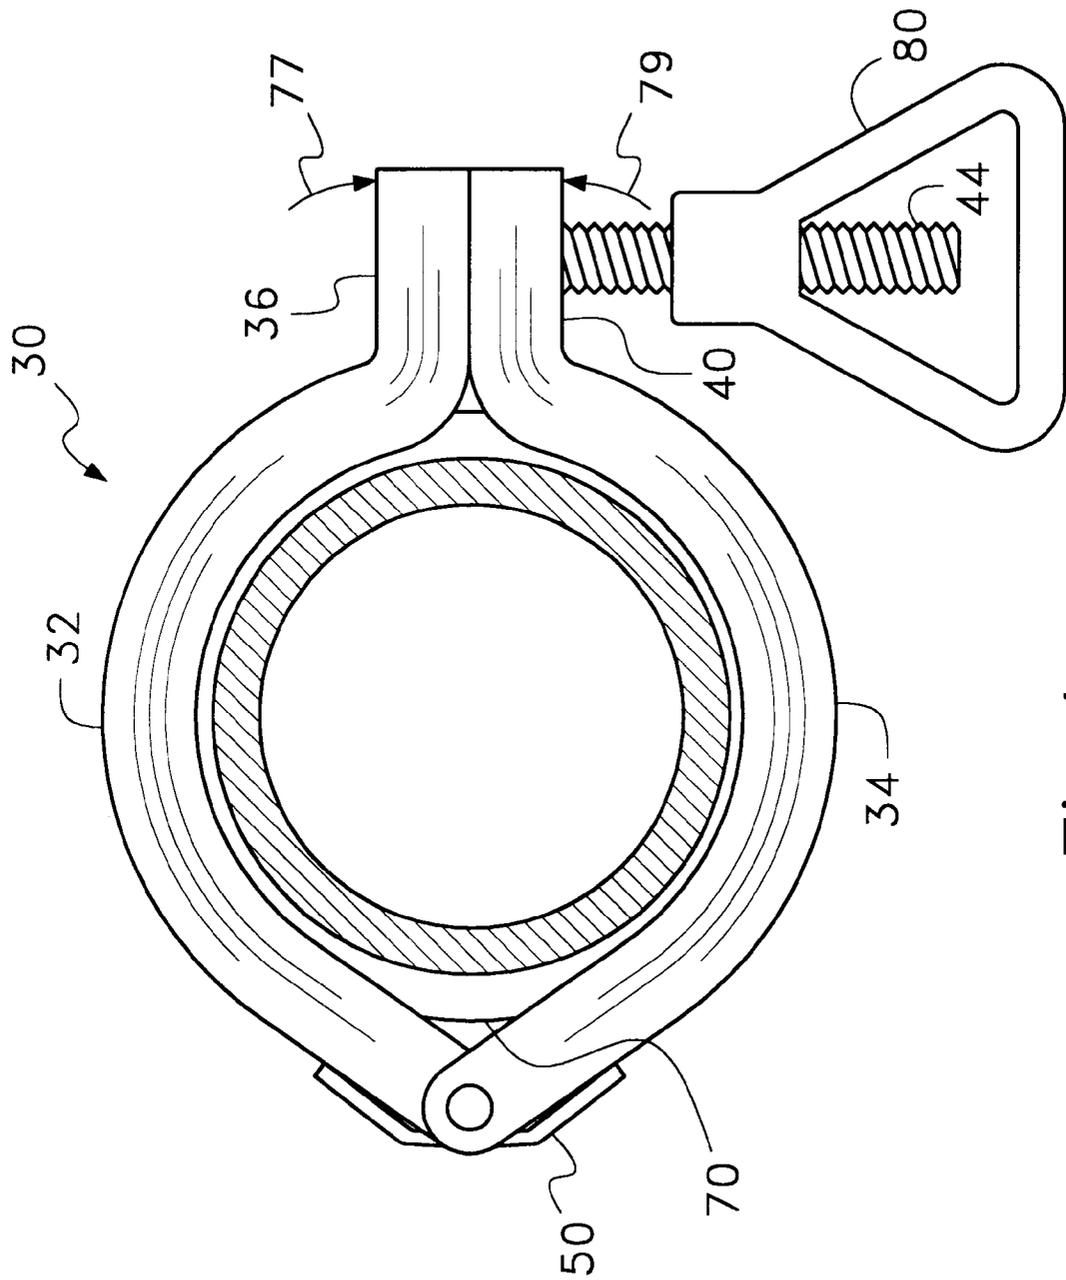


Fig. 4

## SPRING BIASED CLAMPING DEVICE FOR FLANGED CONNECTIONS

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to clamping devices, commonly known as pipe clamps, that are used to join together the flanged ends of two objects so that a fluid impervious seal is created between the opposing flanges. More particularly, the present invention relates to such clamping devices that are normally biased into a predetermined configuration by spring elements.

#### 2. Description of the Prior Art

In the manufacture and processing of pharmaceutical products, dairy products and other materials that require a sanitary processing environment, it is common for materials to be pumped from between points using a network of fixed pipes. To introduce materials into the processing system, supply trucks or supply containers are coupled to one of the pipes in the system. In many instances, connections between supply containers and pipes are made by aligning and joining flanged connections. Flanged connections are also a very common method of interconnecting different segments of pipe within the system. A flanged connection is a termination that can be constructed at the end of a pipe or at a port of a container. The flanged connection is a circular flange that radially extends from a pipe or the neck of a container, wherein the flange extends outwardly in the same plane as the open end of the pipe or container. To join any two flanged connections together, the two flanges are placed in abutment so that the openings in the center of each of the flanges align. An O-ring or other sealer is placed between the two flanges. The flanges are then clamped together in a manner that compresses the O-ring and prevents the flanges from falling out of alignment.

In the prior art, there are many different types of clamping mechanisms that have been used to join together flanged connections. Typically, the clamps that have been used are annular in shape. Hinges are disposed along the annular structure to enable the annular structure to open. The clamps are opened and are then closed over the span of the two adjoining flanges. The presence of the clamping device biases the adjoining flanges together and prevents the adjoining flanges from moving out of their aligned positions.

Prior art clamping devices with a single hinge are exemplified by U.S. Pat. No. 5,018,768 to Palatchy, entitled Pipe Coupling Hinge. Prior art clamping devices with multiple hinges are exemplified by U.S. Pat. No. 4,568,115 to Zimmerly, entitled Multi-Piece Pipe Clamp. Regardless of the number of hinges present, such prior art clamping device typically contain a rocking bolt that is pivotably connected to one end of the clamp. A wing nut is positioned on the rocking bolt. The wing nut passes over a slot that is positioned on the opposite end of the clamp. By tightening the wing nut, the diameter of the clamp can be reduced and the clamp can be tightened over the flanged connections.

In many applications, small containers are coupled to pipes using flanged connections and clamps. To elevate the container to the pipe, the container must be supported by at least one hand. This leaves only one hand to manipulate the clamping device into place. To manipulate the clamp with one hand is very difficult and time consuming. Often the clamp is dropped or the contents of the container are spilled as a person juggles the container and the clamp into the proper position.

One of the reasons the prior art clamping devices are difficult to manipulate with one hand is because the two open

ends of the clamp must be pulled together around the flanged connection. Once in close proximity, the rocking bolt at one end of the clamp must be passed into the slot at the opposite side of the clamp and the wingnut on the rocking bolt must be tightened. These maneuvers are difficult with one hand and require that the clamping device be balanced on the flanged connection as the hand releases the clamp at one point and moves to engage the clamp at another point.

In the prior art, clamping devices have been developed that were intended to reduce the complexity of applying a clamping device over a flanged connection. One such prior art device is described in U.S. Pat. No. 4,657,284 to Fiori, entitled Remotely Manipulatable Clamp. In this patent, a clamp is disclosed that is capable of being set in place of removed by a robotic arm in a hazardous environment such as with a nuclear reactor. The clamp device is biased in a closed condition and can be temporarily opened by being compressed with robotic grippers. The Fiori device shows a clamp that will hold itself in place, however, with only one hand a person would find it very difficult to open the clamp, set it in position, set the rocking bolt into position and tighten the wingnut on the rocking bolt.

A need therefore exists in the art for a clamping device to join flanged connections that can be easily set in place with the manipulations of one hand. This need is met by the present invention as described and claimed below.

### SUMMARY OF THE INVENTION

The present invention is a clamp device for joining a flanged connection. The clamp device has a plurality of arcuate segments, wherein each of the arcuate segments has two ends. A pivot couples at least one end of each arcuate segment to another of the arcuate segments to produce a chain of arcuate segments that extend from a first end to a second end. The chain of arcuate segments is configurable into an annular structure when the first end is brought into abutment with the second end. A torsion spring is disposed around each pivot. Each torsion spring acts to bias the arcuate segments into the configuration that produces the annular structure.

A rocking bolt is coupled to the second end of the chain of arcuate segments. The rocking bolt is joined to the second end by a second pivot and is positionable throughout a predetermined range. A biasing element is provided for biasing the rocking bolt into one position within the predetermined range.

### BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, reference is made to the following description of exemplary embodiments thereof, considered in conjunction with the accompanying drawings, in which:

FIG. 1 is a selectively cross-sectioned view of a flanged connection between a container and a supply pipe to illustrate the environment of use for the present invention;

FIG. 2 is a selectively cross-sectioned side view of an clamp device in accordance with the present invention, the embodiment is shown in a condition between open and closed;

FIG. 3 is a side view of the embodiment of FIG. 2 shown in an open condition with a flanged connection; and

FIG. 4 is a side view of the embodiment of FIG. 2, shown in a closed condition, wherein the clamp device is closed around a flanged connection.

### DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 1, there is shown a typical prior art container 10 with a flanged connection 12. The container 10

is positioned adjacent a pipe **14** that leads into some piping network. The pipe **14** also contains a flanged connection **16**. The flanged connection **12** on the container **10** and the flanged connection **16** on the pipe **14** have the same general shape. Each flanged connection **12, 16** has a flat face surface **18** that faces the opposing flanged connection. The rear surface **20** of each flanged connection **12, 16** is sloped. When the two flanged connections **12, 14** are joined together, the face surfaces **18** abut and the sloped rear surfaces **20** form a frustum shaped structure. An O-ring **22** is disposed between the opposing face surfaces **18**, thereby creating the desired seal.

The present invention is a clamping device that extends around the two flanged connections **12, 16** when in abutment. The clamping device biases the face surfaces **18** together, thereby compressing the O-ring **22** and creating the desired seal. Referring to FIG. 2, a first exemplary embodiment of a clamp device **30** is shown in accordance with the present invention. From FIG. 2, it can be seen that the clamp device **30** contains at least two arcuate segments **32, 34**. The arcuate segments **32, 34** are joined together, thereby forming a structure that can be configured into generally annular shape. The first arcuate segment **32** terminates with a leg section **36** that extends away from the center or radius for the arcuate segment **32**. A slot **38** (shown with hidden lines) is formed in the center of the leg section **36**, as is common in prior art clamping devices. The second arcuate segment **34** also contains a leg section **40** that defines a slot **42**. However, the base of a rocking bolt **44** is positioned within the slot **42**. The base of the rocking bolt **44** is connected to the second arcuate segment **34** by a pivot **46**. The pivot **46** enables the rocking bolt **44** to rotate freely within the range of the slot **42**.

In the embodiment of FIG. 2, the first arcuate segment **32** is connected to the second arcuate segment **34** at a pivot **48**. This enables the first arcuate segment **32** and the second arcuate segment **34** to move relative to one another between an open condition and a closed condition. In FIG. 2, the clamp device **30** is shown between an open condition and a closed condition. An open condition is shown on FIG. 3 and a closed condition is shown in FIG. 4.

In FIG. 2, it can be seen that a torsion spring **50** is located at the pivot **48** between the first arcuate segment **32** and the second arcuate segment **34**. The torsion spring **50** has a first arm **52** that engages the first arcuate segment **32** and a second arm **54** that engages the second arcuate segment **34**. The torsion spring **50** biases the clamp device **10** into a closed condition. As a result, the torsion spring **50** biases the first arcuate segment **32** toward the second arcuate segment **34** in the direction of arrow **55**. Similarly, the torsion spring **50** biases the second arcuate segment **34** toward the first arcuate member **32** in the direction opposite that of arrow **55**.

A torsion spring **60** is also positioned around the pivot **46** that joins the base of the rocking bolt **44** to the second arcuate segment **34**. The torsion spring **60** has one arm **62** that engages the second arcuate segment **34** and a second arm **64** that engages the shaft of the rocking bolt **44**. The torsion spring **60** biases the rocking bolt **44** in the direction of arrow **65** to a point where the angle A between the rocking bolt **44** and the arm section **40** of the second arcuate segment **34** is acute.

Referring to FIG. 3, it can be seen that to apply the clamp device **30** over a flanged connection **70**, the first arcuate segment **32** and the second arcuate segment **34** must be rotated away from one another, thereby creating an opening

wide enough for the flanged connection **70** to pass. To open the clamp device **30**, the first arcuate segment **32** is rotated in the direction of arrow **71** and the second arcuate segment **34** is rotated in the direction of arrow **73**. Such a manipulation acts against the bias of the torsion spring **52** that is positioned between the first arcuate segment **32** and the second arcuate segment **34**.

Additionally, to move the rocking bolt **44** out of the way, the rocking bolt **44** must be rotated in the direction of arrow **75**. This manipulation acts against the bias of the torsion spring **60** (FIG. 2) that engages the rocking bolt **44**. The manipulation needs to spread the two arcuate segments **32, 34** and move the rocking bolt **44** out of the way can easily be done with one hand. The thumb is used to push the rocking bolt **44** to the side, while the remaining fingers spread the two arcuate segments together **32, 34** by pressing the arcuate segments **32, 34** against the palm.

Once manipulated into a fully open position, as shown in FIG. 3, then the open clamping device **30** can be positioned around a flanged connection **70**. Once a person's hand is removed from holding the clamp device **30** open, the clamp device **30** automatically returns to a closed position due to the bias of the various torsion springs.

Referring to FIG. 4, it can be seen that once released, the clamp device reverts to a closed condition. The first torsion spring **50** biases the first arcuate segment **32** in the direction of arrow **77** and the second arcuate segment **34** in the direction of arrow **79**. As a result, the two leg sections **36, 40** of the two arcuate segments **32, 34** abut against each other and complete an annular enclosure around the flanged connection **70**. Furthermore, the second torsion spring **60** (FIG. 2) biases the rocking bolt **44** into the slot **38** (FIG. 2) on the opposing element. As a result, the clamping device **30** can be released and it will not fall away from the flanged connection **70**. A person, with only one hand, can therefore release the clamp device **30** and tighten the wingnut **80**, thereby setting the clamp device **30** into place.

In the embodiment of FIGS. 2-4, the clamp device **30** was comprised of only two arcuate segments **32, 34**. However, in the prior art, there are clamp devices made of three and four arcuate segments. The technology of the present invention can be adapted to a clamp structure that has any plurality of arcuate segments. To do so, a torsion spring is added to every pivot point so that at every pivot point the various arcuate segments are biased into a closed condition. In this manner, regardless to the number of arcuate segments used, the clamp device will automatically revert to a closed condition when placed around a flanged connection.

It will be understood that the various figures described above illustrate only one preferred embodiment of the present invention. A person skilled in the art can therefore make numerous alterations and modifications to the shown embodiment utilizing functionally equivalent components to those shown and described. For example, there are numerous types of spring elements and spring configurations that can be substituted for the torsion springs described. All such modifications are intended to be included within the scope of the present invention as defined by the appended claims.

What is claimed is:

1. A clamp device for a flanged connection, comprising: a plurality of arcuate segments containing a first arcuate segment and a last arcuate segment, wherein said plurality of arcuate segments are joined together by at least one first pivot that enables said plurality of arcuate segments to be manipulated between an open condition and a closed condition, whereby said plurality of arcuate-

5

ate segments form an annular structure when in said closed condition;

a rocking bolt coupled to said last arcuate segment at a second pivot, wherein said rocking bolt is positionable around said second pivot in a range between a first position and a second position;

a slot defined in said first arcuate segment, wherein said slot receives at least part of said rocking bolt therein when said rocking bolt is at said first position and said plurality of arcuate segments are in said closed condition;

a torsion spring disposed at each said first pivot, wherein each torsion spring that has a first arm that engages one of said plurality of arcuate segments and a second arm that engages a second of said plurality of arcuate segments and biases the arcuate segments into said closed condition; and

at least one second spring element disposed proximate said second pivot for biasing said rocking bolt into said first position.

2. The device according to claim 1, wherein said at least one second spring is a torsion spring that has a first arm that engages said last arcuate segment and a second arm that engages said rocking bolt.

3. An improved clamping device for clamping together a flanged connection, said clamping device comprising:

a string of arcuate segments having a first end and an opposite second end, wherein arcuate segments are pivotably joined together at at least one point between said first end and said second end by at least one pivot;

a rocking bolt coupled to said second end of said string of arcuate segments, wherein said rocking bolt is joined to said second end by a second pivot and is positionable throughout a predetermined range; and

a torsion spring disposed around said second pivot for biasing said rocking bolt into one position in said predetermined range.

6

4. The device according to claim 3, wherein said string of arcuate segments can be oriented into an annular configuration, whereby said first end of said string of arcuate segments abuts against said second end of said arcuate segments.

5. The device according to claim 4, further including at least one second biasing element for biasing said string of arcuate segments into said annular configuration.

6. The device according to claim 4, wherein said first end of said string of arcuate segments defines a slot that accepts said rocking bolt when said rocking bolt is biased into said set position and said arcuate segments are in said annular configuration.

7. A clamp device, comprising:

a plurality of arcuate segments, wherein each of said arcuate segments has two ends;

a pivot coupling at least one end of each arcuate segment to another of said arcuate segments, thereby producing a chain of said arcuate segments that extend from a first end to a second end, said chain of arcuate segments being configurable into an annular structure when said first end is brought into abutment with said second end; and

a torsion spring disposed around each said pivot, wherein each said torsion spring acts to bias said arcuate segments into said annular structure;

a rocking bolt coupled to said second end of said chain of arcuate segments, wherein said rocking bolt is joined to said second end by a second pivot and is positionable throughout a predetermined range; and

a biasing element for biasing said rocking bolt into one position in said predetermined range.

8. The device according to claim 7, whereon said biasing element is a torsion spring disposed around said second pivot.

\* \* \* \* \*